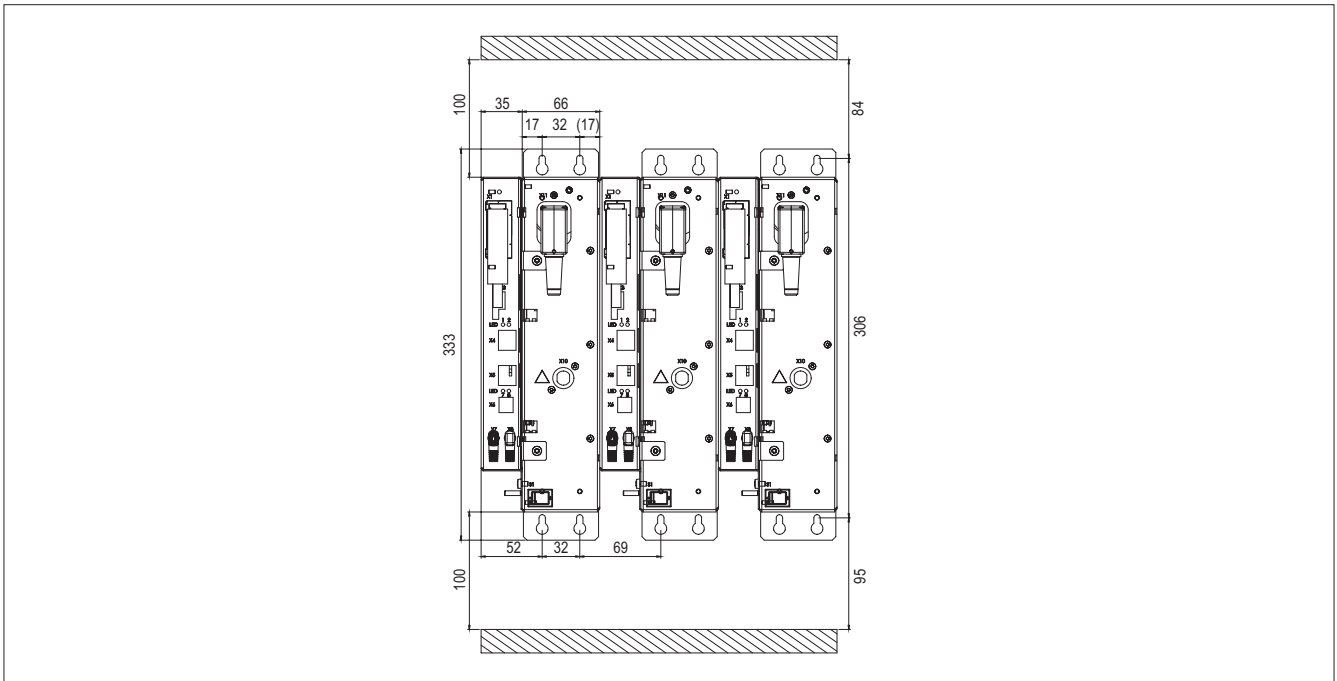


Ultraschall-Generatoren USG iSONIC**Technische Daten****Ultrasonic Generators USG iSONIC****Technical Data****Generator Elektrische Daten****Generator Electrical data**

Arbeitsfrequenz [kHz] Operating frequencies [kHz]	20 (+/-500 Hz)	30 (+/-500 Hz)	35 (+/-500 Hz)
Ausgangsleistung [W] Output [W]	2.000	1.800	400 / 800 / 1.200
Netzspannung [V], Netzfrequenz [Hz] Electrical connection [V AC]	230 (L, N, PE), 50/60		
Nennstrom [A] Power consumption [A]	10,6	11	2,4 / 4,3 / 6,0
Netzabsicherung [A] Mains frequency [Hz]	2 x T 12,5 (intern)		
Einschaltdauer (ED) Switch-on duration	40 %	50 %	100 % / 50 % / 50 %
Gehäuse-Abmessungen ohne Montageplatte (BxHxT) [mm] Case dimensions without a mounting plate (w x h x d) [mm]	100 x 285 x 270		
Gehäuse-Abmessungen mit Montageplatte (BxHxT) [mm] Case dimensions with a mounting plate (w x h x d) [mm]	100 x 333 x 271		
Gewicht [kg] Weight [kg]	5,7		